

FIG. 1

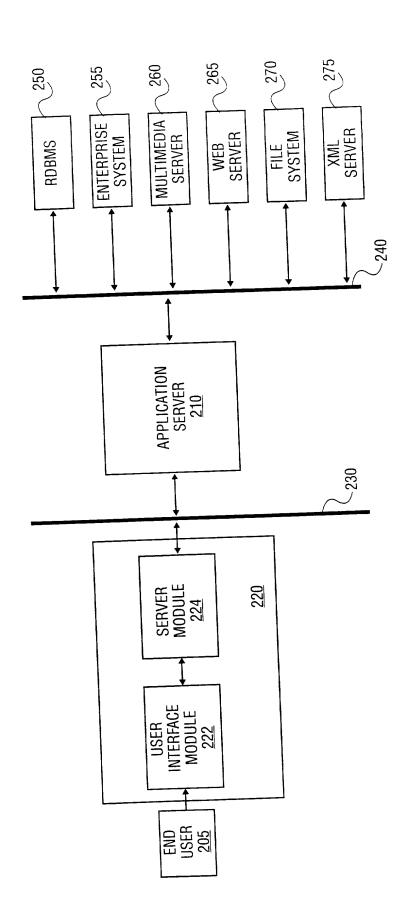


FIG. 2

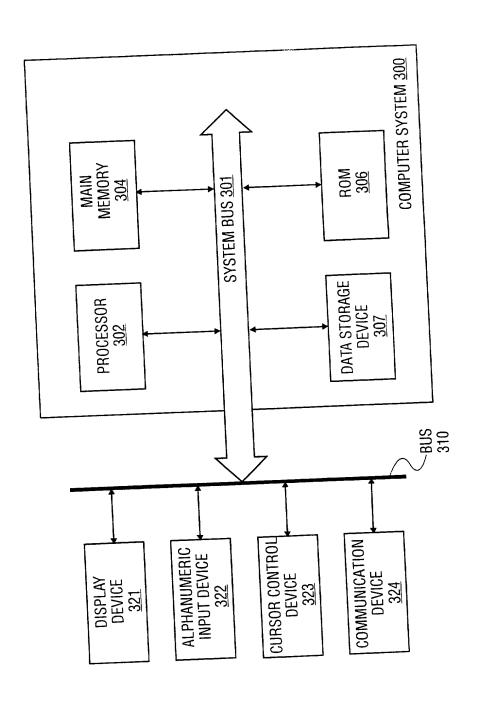
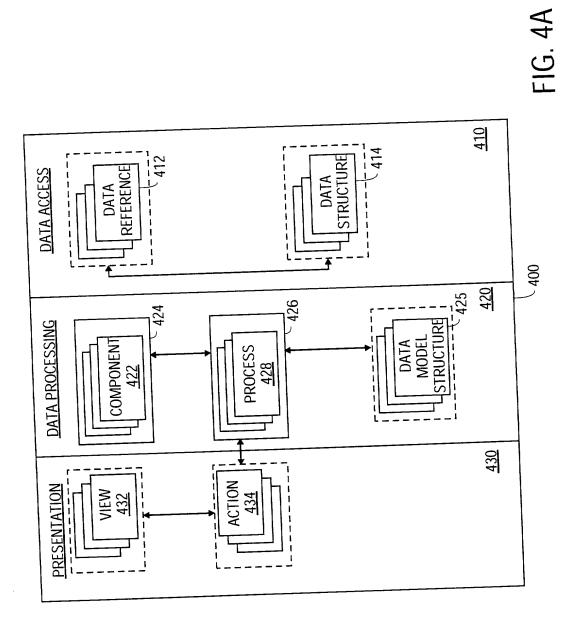


FIG. 3



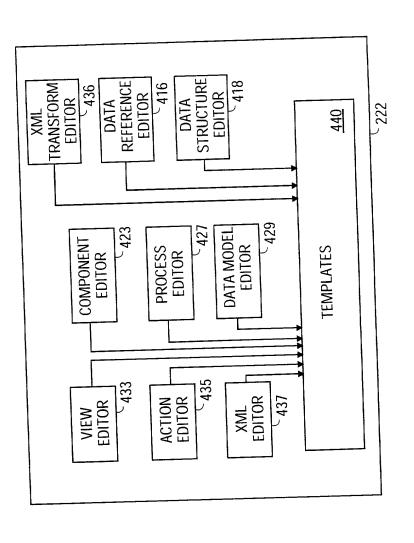


FIG. 4B

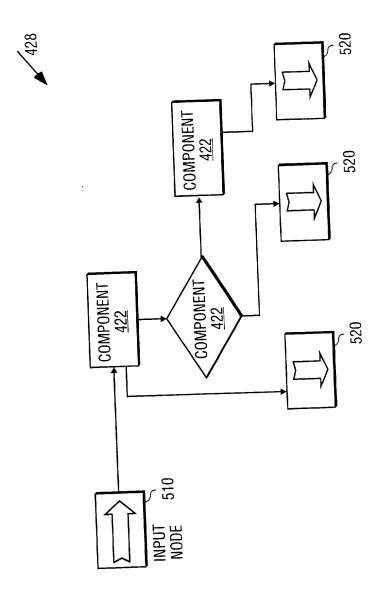


FIG. 5

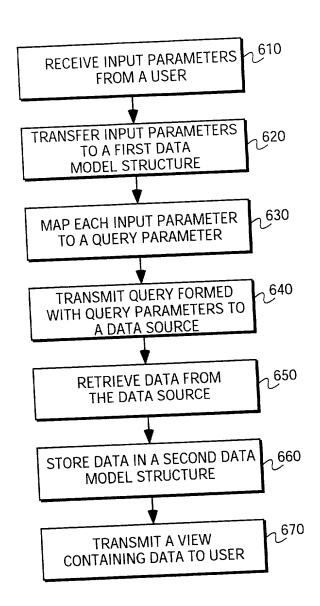


FIG. 6

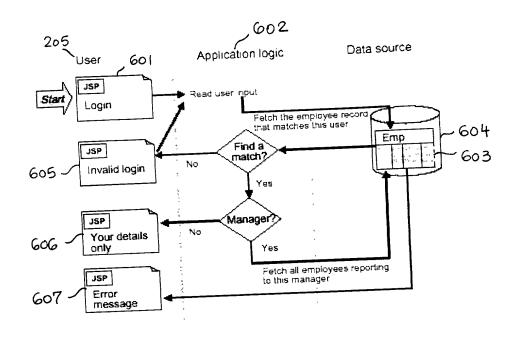


FIG. 6A

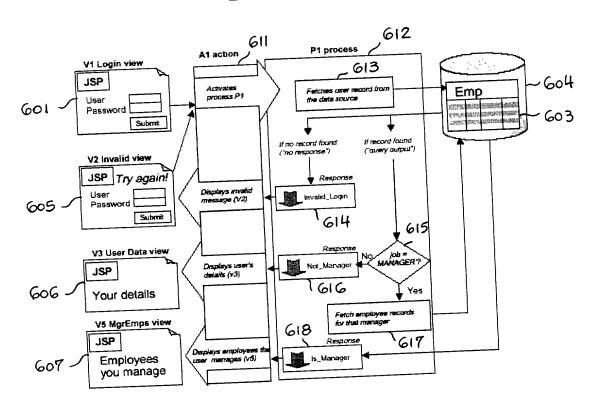


FIG. 6B

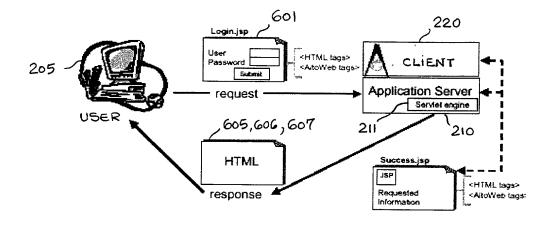


FIG. 6C

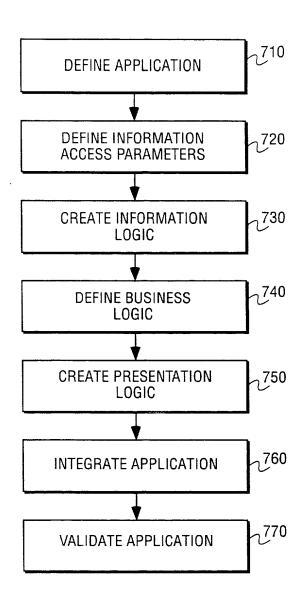


FIG. 7

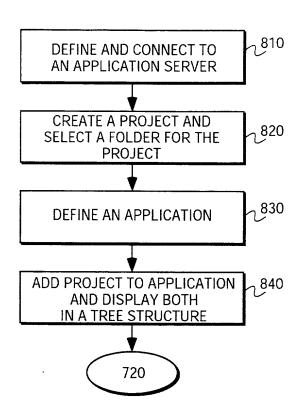


FIG. 8

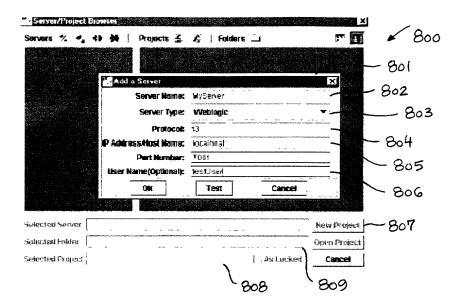


FIG. 8A

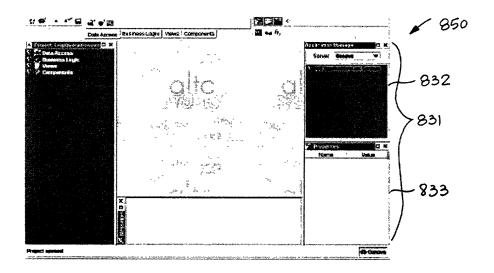


FIG. 8B

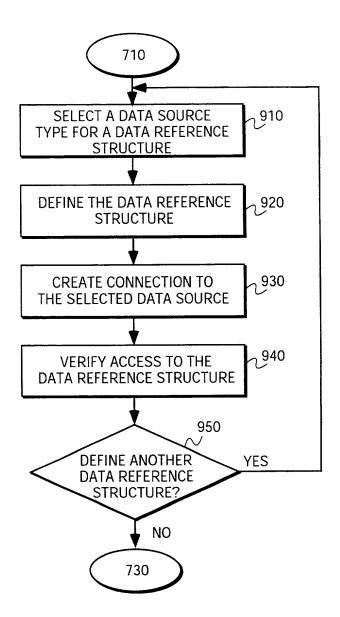


FIG. 9

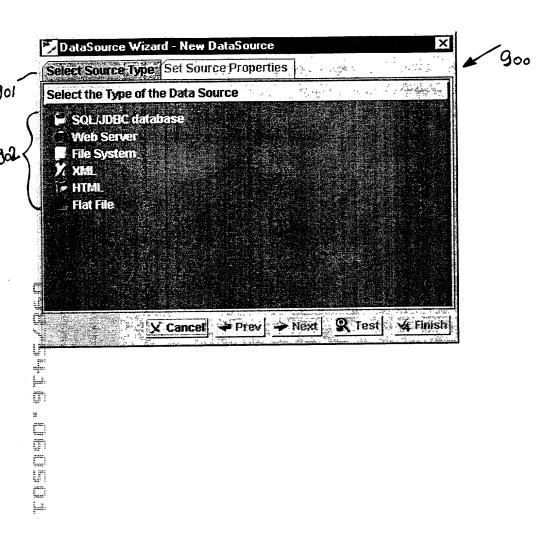


Fig. 9A

	903	
		× 900
	Sat Source Proporties	
Selected Data Sol	rce Type: 🔍 SQL Database	904
	of Connection to the SQL DataSource	722
● JDBC Driver	○ JINDI Data Source	
User name	scott	906
Password	*****	907
Database URL	dbc:weblogic:oracle:beq-local	908
JDBC driver Connect Options	weblogic.jdbc.oci.Driver	909
	X Cancel → Prev → Next & Test 4 Fini	sh]
	911	912

FIG. 9B

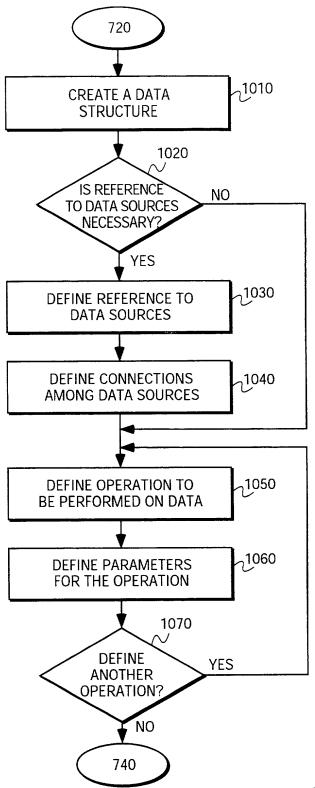


FIG. 10

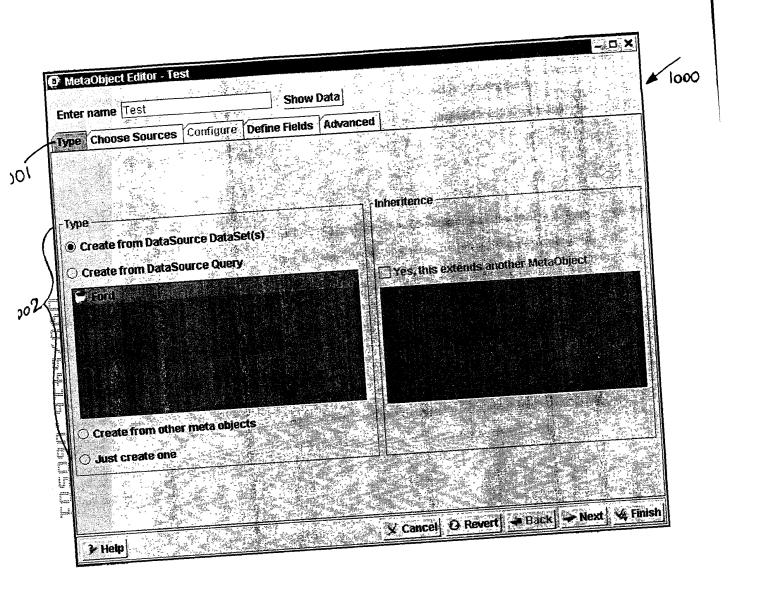


Fig. 10A

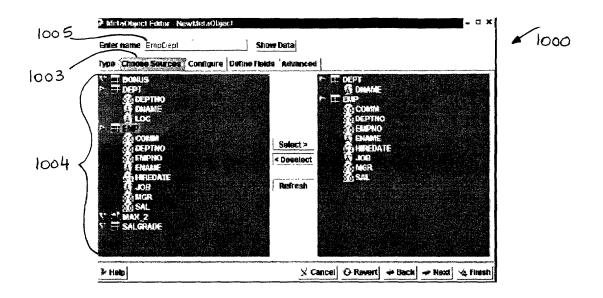


FIG. 10B

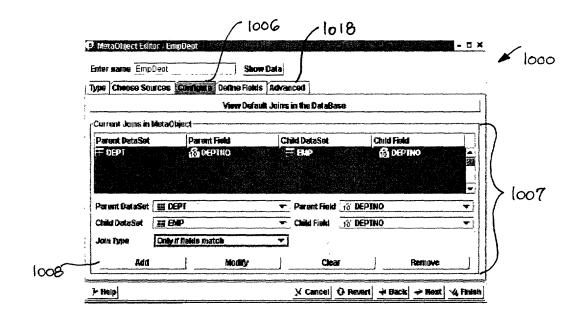


FIG. 10C

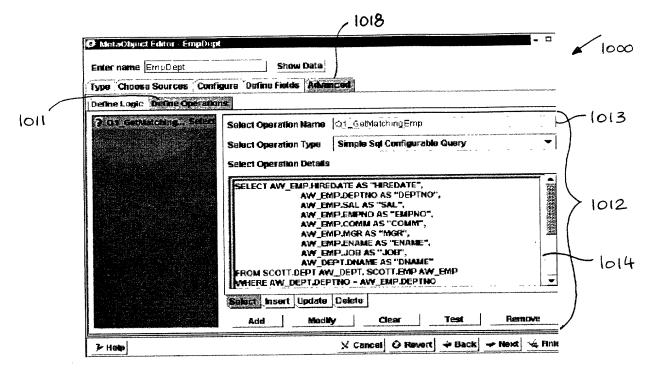


FIG. 10D

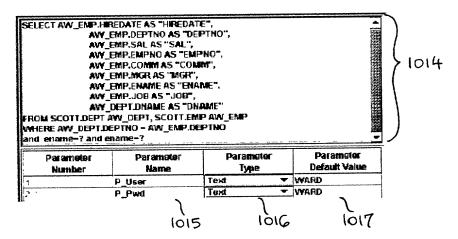


FIG. 10E

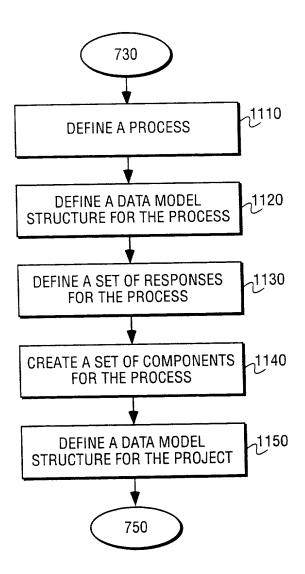


FIG. 11

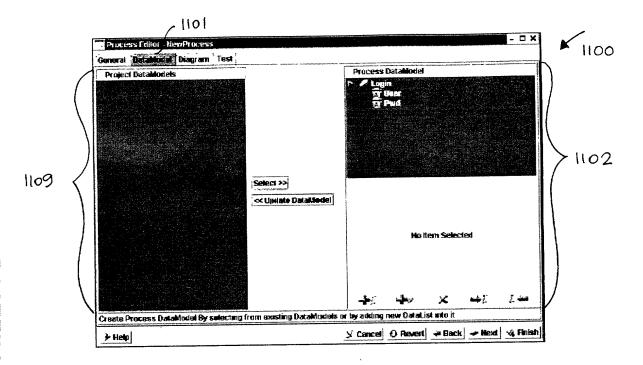


FIG. 11A

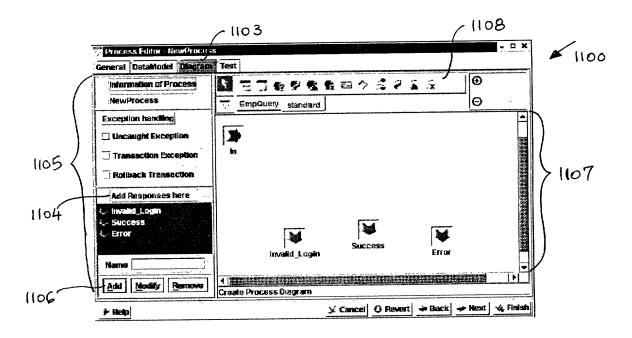


FIG. 11B

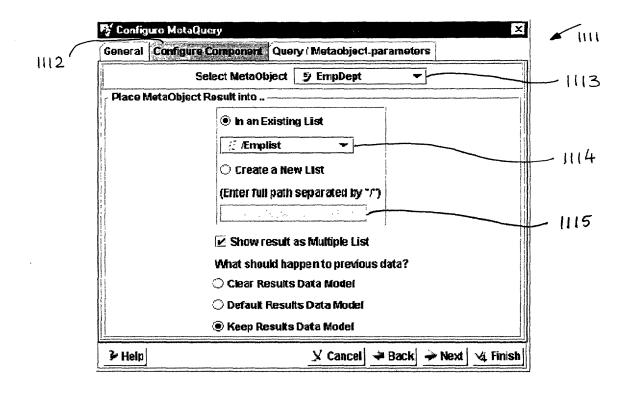


FIG. 11C

	/1117 /1116	
🌠 Configure MetaQuery		X IIII
General Configure Component Que	y Matachject-parameters	
Select Query 3 Q1_GetMatchin		
Map Query parameters(if any) to Pro	ocess-DataModel	
Query Parameters	Read From	
P_User	函 /Legin/User	and Company
P_Pwd	Ar Login/Pwd	
Map parameters of MetaObject(if an	ny) to Process-DataModel (Optional)	
MetaObject Parameters	Read From	
≯ Help	✓ Cancel	n

FIG. 11D

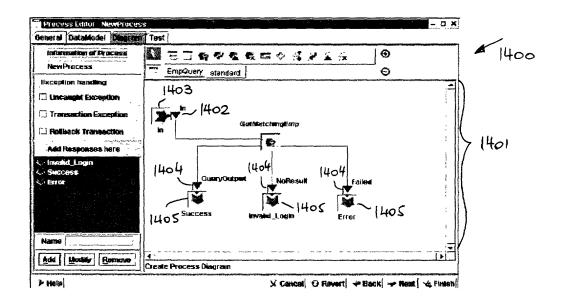


FIG. 11E

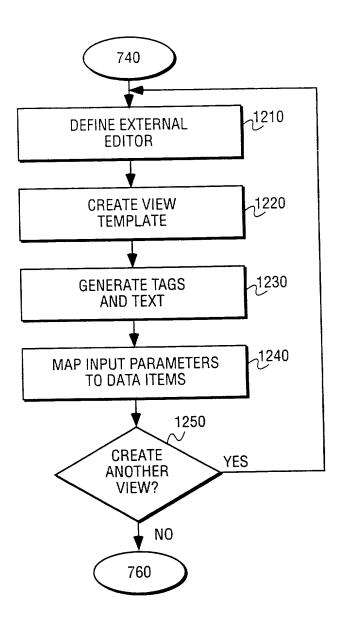


FIG. 12

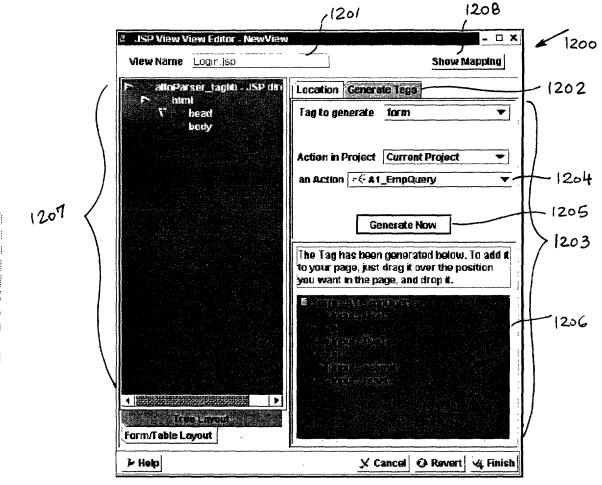


FIG. 12A

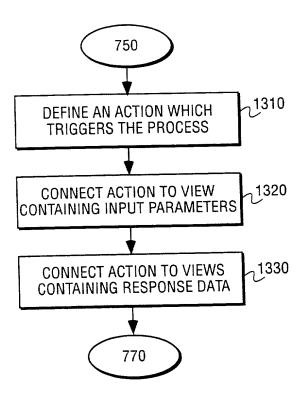


FIG. 13

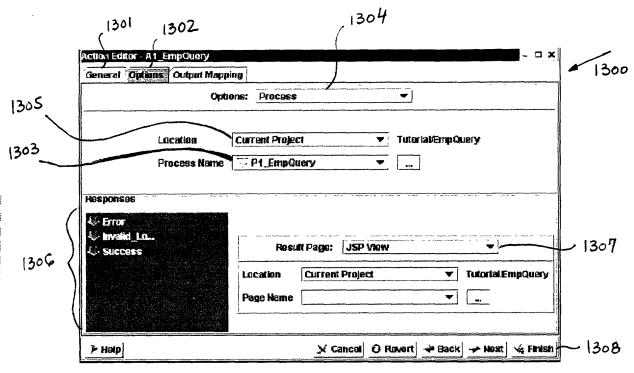


FIG. 13A

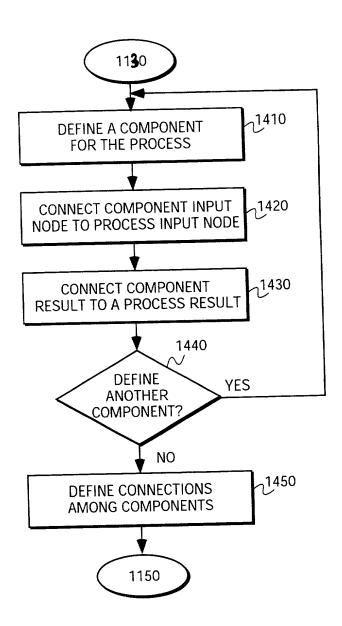


FIG. 14

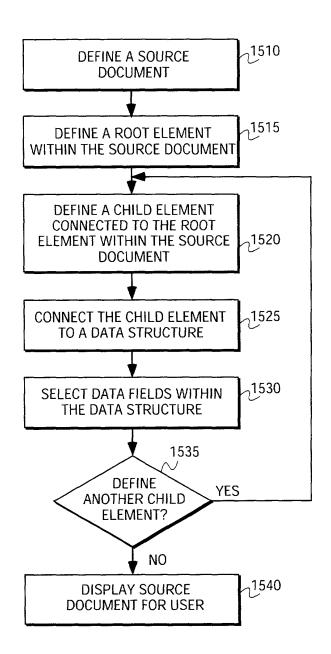


FIG. 15

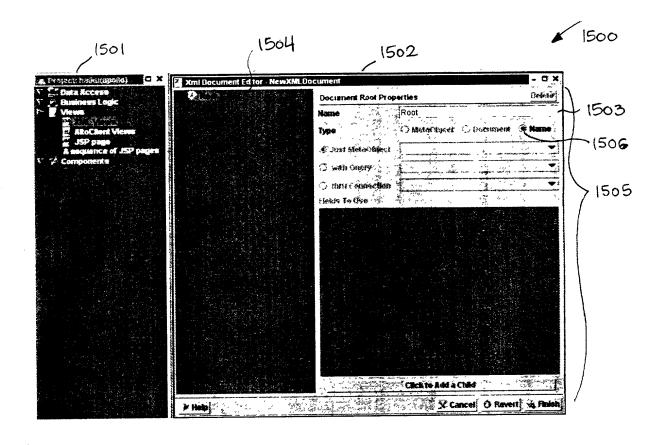


Fig. 15A

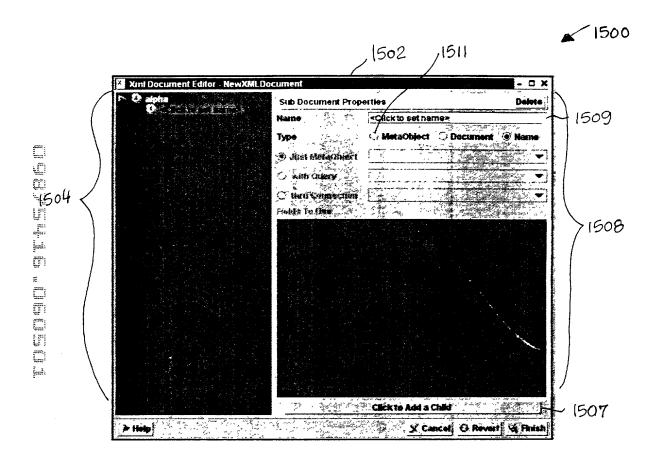


Fig. 15B

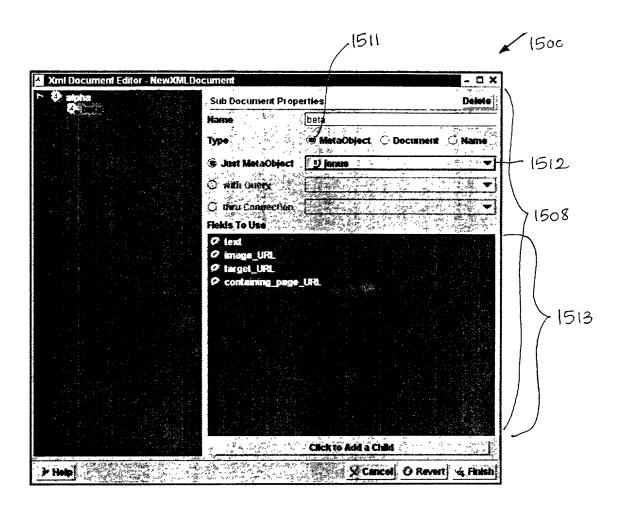


Fig. 15C

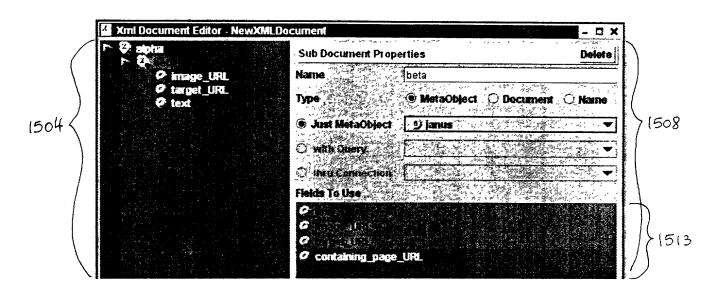


Fig. 15D

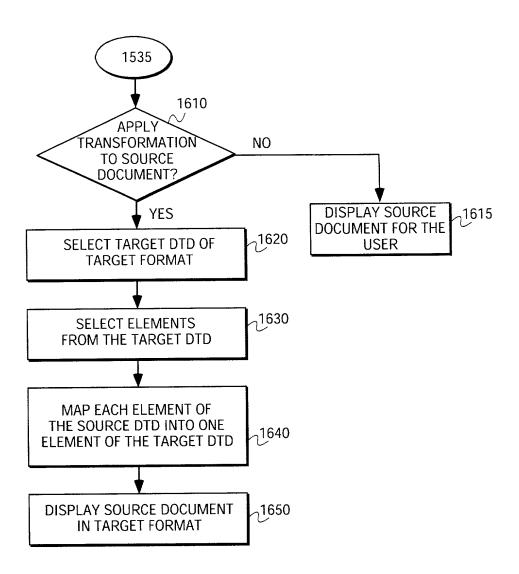


FIG. 16

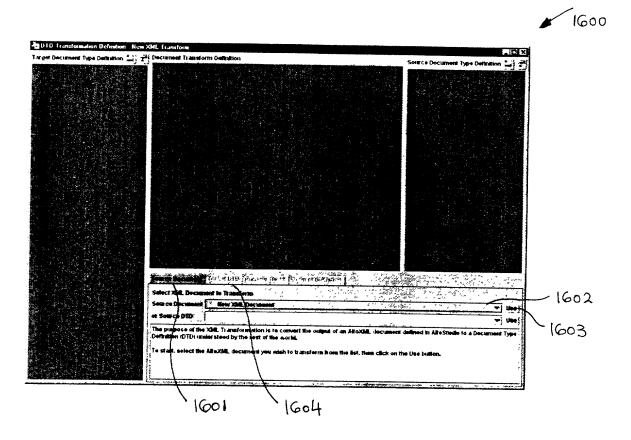


Fig. 16A

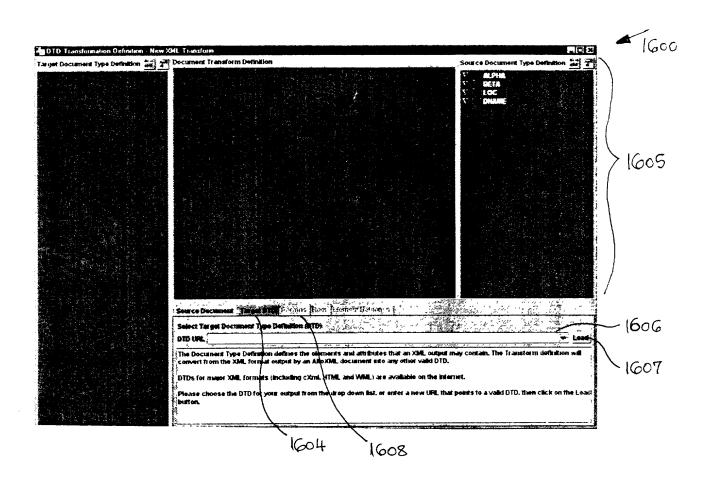


Fig. 16 B

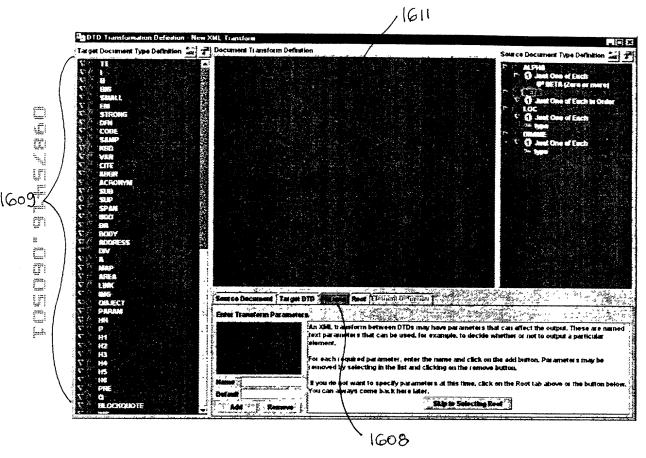


Fig. 16 C

Fig. 16 D

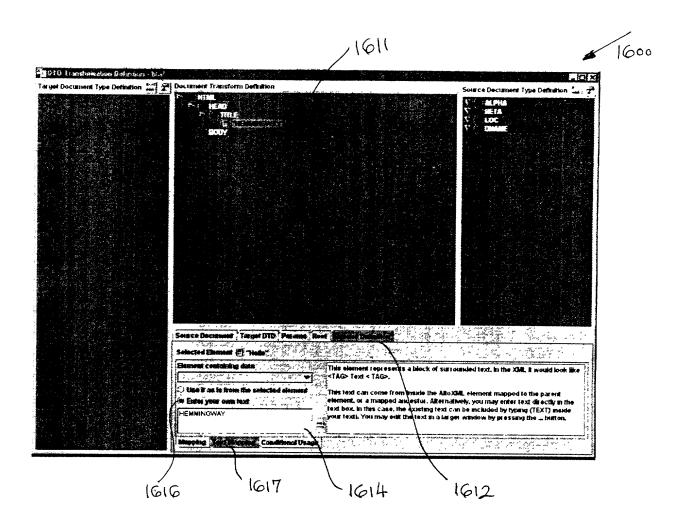


FIG. 16 E

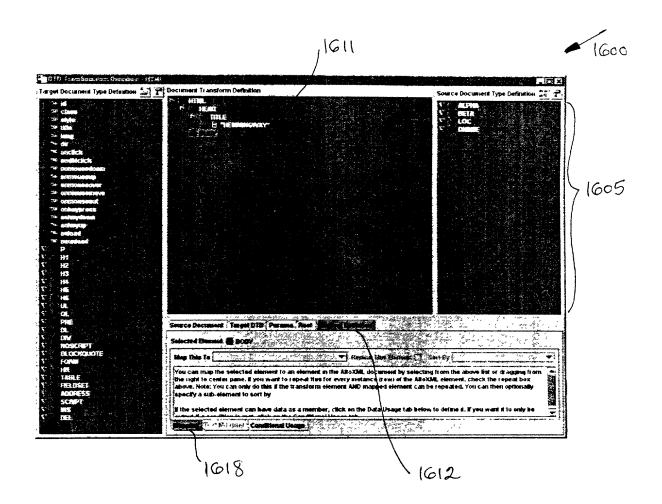


Fig. 16F